


TABLE SAW WITH CARRIAGE FLUSH WITH THE BLADE 255 MM

TABLE SAW


- Mechanically welded frame, cast iron trunnion for the sawing unit.
- Cast iron main table with right and rear extensions in steel.
- Large sliding table with graduated fence and extendable stop to 2280 mm.
- Cleaning hatch on the upper cabinet, allowing the removal of sawdust and wooden scraps.
- Blades height and tilt adjustment by two independent cranks.
- Suction outlet Ø 30 mm on the blade guard, connected to the main dust outlet by a flexible hose (supplied).



1320 mm sliding carriage flush with the blade

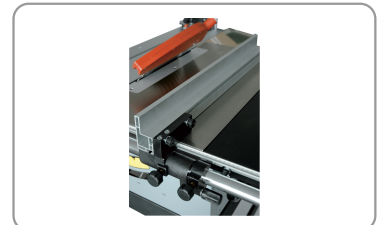


Guide de refente avec réglage micrométrique

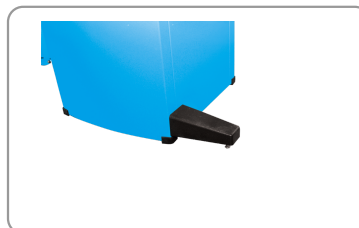

Frame reinforcement foot



RÉF	SST256
Conditionnement	1
Colisage	Machine : 860 x 625 x 570 mm
Garantie	24
Poids net	152 kg
Poids brut	165 kg
Encombrement machine montee	2260 x 2070 x 1160 mm
Reference pour pieces detachees	070400 (+ N°/ vue éclatée)
Puissance moteur (230 V - 50 Hz)	2100 W - S6 / 40%
Vitesse de rotation	4060 tr/min
Diamètre et alésage de la lame	Ø 255 x 30 mm
Inclinaison de la lame	45° à droite
Hauteur de travail	850 mm
Hauteur de coupe maximale	80 mm
Hauteur de coupe à 45°	54 mm
Dimensions de la table Scie	1210 x 620 mm
Dimensions du chariot de coupe	1320 x 238 mm
Dimensions de la table du chariot	600 x 400 mm
Course de délignage contre la règle	1200 mm
Largeur maximale de délignage	610 mm
Diamètre sortie d'aspiration	Ø 100 mm
Colisage : Chariot	1380 x 380 x 130 mm
Colisage : Table du chariot	890 x 515 x 150 mm
Colisage : Rallonge de table	805 x 305 x 55 mm
	3700501706254

SOLID WOOD

WOOD-DERIVED
PANELS

METAL

TILE

CONCRETE
MASONRY

STONE TILE

MULTI
MATERIALS

PLASTER &
SOFT
MATERIALS

ASPHALT

ACCESSORIES

ACCESSOIRES

070410



Mobile wheel kit

SOLID WOOD

WOOD-DERIVED
PANELS

METAL

TILE

CONCRETE
MASONRY

STONE TILE

MULTI
MATERIALS

PLASTER & AMP;
SOFT
MATERIALS

ASPHALT

ACCESSORIES