AIR FILTRATION SYSTEM 300W


SUCTION

- Size 770 x 610 x 310 mm.
- Allows the removal of small airborne wood dust in workshops, and complements a traditional wood chip hoover.
- Filters 98% of 5 micron dust and 85% of 1 micron dust.
- Can be suspended from the ceiling (hooks supplied) or placed on a workbench.
- Switching on, off, airflow (3 levels) and running time (1h, 2h, or 4h) can be operated from the control panel or the remote control.
- The inner filter can be blown out with compressed air and cleaned with water.
- Quick filter change.





Machine interior

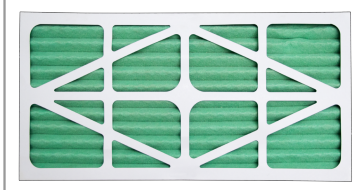

Filtre extérieur



Remote control

SOLID WOOD | WOOD-DERIVED PANELS | METAL | TILE | CONCRETE MASONRY | STONE TILE | MULTI MATERIALS | PLASTER & SOFT MATERIALS | ASPHALT | ACCESSORIES

RÉF	SFA300
Conditionnement	1
Colisage	830 x 680 x 375 mm
Garantie	24
Poids net	25 kg
Poids brut	29 kg
Encombrement machine montee	770 x 610 x 310 mm
Reference pour pieces detachees	092100 (+ N°/vue éclatée)
Puissance moteur (230 V - 50 Hz)	300 W - S1
Diamètre de l'hélice	Ø 252 mm
Filtre extérieur	98% des particules de 5µ
Filtre intérieur	85% des particules de 1µ
Débit d'air Lent / Moyen / Haut	945 m³/h / 1193 m³/h / 1774 m³/h
Pression Acoustique L / M / H	LpA: 63 / 66 / 68 dB(A)
Durées programmables	3 : 1 h / 2 h / 4 h
Alimentation télécommande	2 piles LR03 - 1,5 V (non fournies)
Indice de protection	IP20
	3661589111821


ACCESSOIRES

092101



Filtre intérieur de rechange 1µ

092102



Filtre extérieur de rechange 5µ