


BANDSAW 250 MM

BAND SAW

- Mechanically welded frame, rigid and strong.
- Fixing holes on the base allowing the machine to be fixed on a stand or a workbench.
- Ø 60 mm suction outlet at the rear of the machine.
- Induction motor, tough and silent.
- 45° tilting cast aluminum sawing table, graduations on each side of the blade, rip fence can be positioned on the right or left.
- 60° adjustable miter gauge, positionable to the right of the table.
- Upper and lower blade guides with 3 bearings.
- Adjustment of the blade tension with a knob.
- 2 cast aluminum wheels well balanced and covered with a rubber tyre.
- Cleaning brush on the drivewheel, allowing the blade to have a good grip.
- Safety switch on each door.
- Contacteur de sécurité sur chacune des portes.

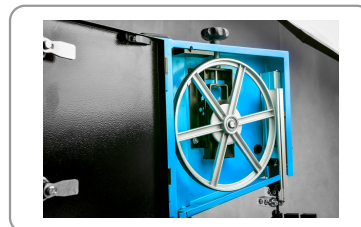

Balanced cast aluminium flywheels and safety contactors

SOLID WOOD

WOOD-DERIVED
PANELS

METAL

TILE

CONCRETE
MASONRY

STONE TILE

MULTI
MATERIALS

PLASTER &
SOFT
MATERIALS

ASPHALT

ACCESSORIES

ACCESSOIRES

110001



Stand

SOLID WOOD

WOOD-DERIVED
PANELS

METAL

TILE

CONCRETE
MASONRY

STONE TILE

MULTI
MATERIALS

PLASTER & AMP;
SOFT
MATERIALS

ASPHALT

ACCESSORIES