

## WOOD LATHE 406 MM

### WOOD LATHE


- Headstock, tailstock, and bed in cast iron for high stability and vibration-free running.
- Bed drilled to be fixed on a stand (optional) or on a workbench.
- Accessories and tools holder on the back of the bench.
- Tailstock with cam lock, live spur MT2 adjustable by handwheel.
- Headstock and tailstock drilled at 10 mm to remove either the headstock spur or the tailstock live center (push-out rod supplied), and to allow the use of a drill bit.
- 200 mm articulated tool rest in cast iron with cam lock.
- Optional bed extension to get a distance between centers of 1025 mm.



12-position indexing



Broche entraînement fileté  
m33 x 3.5 mm

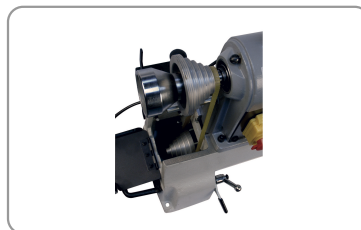

6 spindle speeds

SOLID WOOD

WOOD-DERIVED  
PANELS

METAL

TILE

CONCRETE  
MASONRY


STONE TILE

MULTI  
MATERIALS

PLASTER &  
SOFT  
MATERIALS

ASPHALT

ACCESSORIES

RÉF	TAB040
Conditionnement	1
Colisage	850 x 455 x 290 mm
Garantie	24
Poids net	42 kg
Poids brut	47 kg
Encombrement machine montee	990 x 290 x 450 mm
Reference pour pieces detachees	150300 (+ N°/ vue éclatée)
Puissance moteur (230 V - 50 Hz)	580 W - S1
Hauteur du banc	190 mm
Nombre de vitesses	6
Vitesse de rotation	350 - 670 - 1025 - 1500 - 2225 - 3250 tr/min
Diviseur	12 positions
Distance entre pointes	406 mm
Diamètre au-dessus du banc	Ø 305 mm
Longueur du support d'outil	200 mm
Broche d'entrainement	M33 x 3,5 mm
Emmanchement des poupées fixe / mobile	Cône Morse CM2 / CM2
Perçage de la poupée mobile	Ø 10 mm
	3700501706100

SOLID WOOD

WOOD-DERIVED  
PANELS

METAL

TILE

CONCRETE  
MASONRY

STONE TILE

MULTI  
MATERIALS


PLASTER &  
SOFT  
MATERIALS

ASPHALT

ACCESSORIES


## ACCESSOIRES

150301



Stand

150302



Stand extension

150303



Bed extension 620 mm

SOLID WOOD

WOOD-DERIVED  
PANELS

METAL

TILE

CONCRETE  
MASONRY

STONE TILE

MULTI  
MATERIALS

PLASTER & AMP;  
SOFT  
MATERIALS

ASPHALT

ACCESSORIES