


WOOD LATHE WITH ELECTRONIC INVERTER 1200 MM

WOOD LATHE

- Cast iron stand with provision for a shelf, stable and aesthetic.
- Cast iron bed drilled to be fixed on the supplied stand or on a workbench.
- 2 mechanical speed ranges by changing the belt position on the pulleys, electronic inverter to adjust the speed with digital display : slow speed from 0 to 1200 rpm and fast speed from 1200 to 3200 rpm.
- 300 mm articulated tool rest in cast iron with cam lock : can be used with or without the extension arm.
- Headstock and tailstock drilled at 10 mm to remove either the headstock spur or the tailstock live center (push-out rod supplied), and to allow the use of a drill bit.
- Headstock features 12 indexing positions.
- Diviseur 12 positions (tous les 30°) pour faire du guillochis, percer la pièce de bois, ou assembler plusieurs essences sur le même ouvrage.



Electronic speed controller

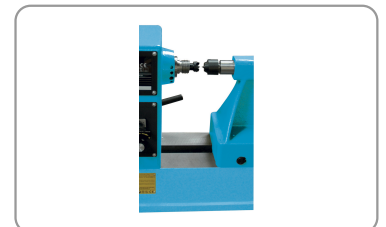

Broche entraînement cm2 fileté m33 x 3,5 mm



Extension and external tool rest

SOLID WOOD

WOOD-DERIVED PANELS

METAL

TILE

CONCRETE MASONRY


STONE TILE

MULTI MATERIALS

PLASTER & SOFT MATERIALS

ASPHALT

ACCESSORIES

RÉF	TAB120
Conditionnement	1
Colisage	1720 x 550 x 560 mm
Garantie	24
Poids net	190 kg
Poids brut	234 kg
Encombrement machine montee	1900 x 420 x 1180 mm
Reference pour pieces detachees	150200 (+ N°/ vue éclatée)
Puissance moteur (230 V - 50 Hz)	1500 W - S1
Hauteur du banc	900 mm
Nombre de vitesses	2
Vitesse de rotation 1 (variable)	De 0 à 1200 tr/min
Vitesse de rotation 2 (variable)	De 1200 à 3200 tr/min
Diviseur	12 positions
Distance entre pointes	1200 mm
Diamètre au-dessus du banc	Ø 450 mm
Diamètre au-dessus de la rallonge	Ø 750 mm
Longueur du support d'outil	300 mm
Broche d'entrainement	M33 x 3,5 mm
Emmanchement des poupées fixe / mobile	Cône Morse CM2 / CM2
Perçage de la poupée mobile	Ø 10 mm
	3700501704816

SOLID WOOD

WOOD-DERIVED
PANELS

METAL

TILE

CONCRETE
MASONRY

STONE TILE

MULTI
MATERIALS

PLASTER & AMP;
SOFT
MATERIALS

ASPHALT

ACCESSORIES

ACCESSOIRES

BAS100



Adjustable suction
nozzle with base

150200.LUN



Steady rest

SOLID WOOD

WOOD-DERIVED
PANELS

METAL

TILE

CONCRETE
MASONRY

STONE TILE

MULTI
MATERIALS

PLASTER & AMP;
SOFT
MATERIALS

ASPHALT

ACCESSORIES